



PS 24V

Datasheet

Power Supply

24V DC Power Supply

Art. 24166012-24HS


PS 24V Power Supply

Overview

- 24V DC Power Supply
- maximum output current of 300mA
- suitable for din rail mounting (1TE)
- Status LED

Specification, Characteristics


type	PS 24V
article number	24166012-24HS
electrical data:	
input voltage	230VAC
maximum input current	50mA
output voltage	24V DC
maximum output current	300mA
technical data:	
storage and transportation temperature	-20°C ... +75°C
operational ambient temperature	-20°C ... +60°C
protection class	IP20
maximum connecting wire crosssection	2,5 mm ²
mounting	dinrail
dimensions	98 x 17.5 x 56 mm

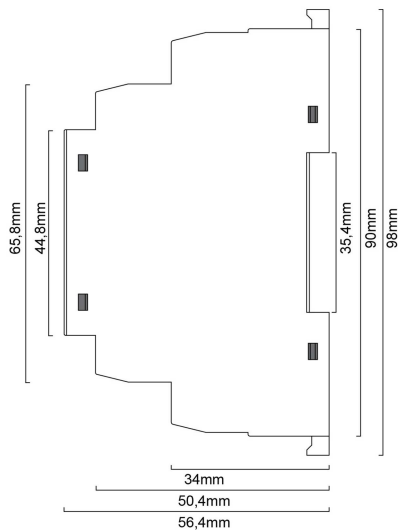

geometry



17,5mm

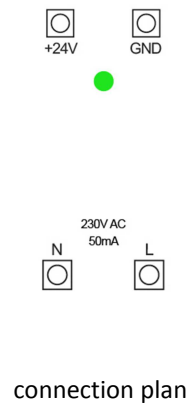

Additional Information and Equipment

DALI-Cockpit – free configuration tool from Lunatone for DALI systems
<http://lunatone.at/en/downloads/Lunatone-DALI-Cockpit.zip>

Lunatone DALI products
<http://www.lunatone.at/en/>

Lunatone datasheets and manuals
<http://lunatone.at/en/downloads/>

Contact

Technical Support: support@lunatone.com

Requests: sales@lunatone.com

www.lunatone.com



Disclaimer

Subject to change. Information provided without guarantee.
The datasheet refers to the current delivery.

The compatibility with other devices must be tested in advance to the installation.