



Datasheet

Control Gear

common plus connector:
Art. Nr. 86458913-350 (350mA)
Art. Nr. 86458913-500 (500mA)
Art. Nr. 86458913-700 (700mA)

DALI-2 RGB LED Dimmer CC DT8

DALI-2 RGB LED Dimmer CC Control Gear

Overview

- DALI LED-Dimmer for RGB colour control
- Suitable for constant current LED-modules
- **Operating Mode DT8:** one DALI-address for the independent control of level and colour (DALI DT8, Type RGBWAF)
- **Operating Mode Colour&Dim:** control by 2 DALI-addresses, one for adjusting the level and one for adjusting the colour
- **SwitchDim2:** 2 switch-inputs offer control of level and colour without DALI
- dimming range 0.1%-100%
- adjustable PWM-frequency (122Hz/244Hz/488Hz/976Hz from FW version 4.6 on changed PWM frequencies: 250Hz / 500Hz / 1kHz)
- types for constant currents of 350mA, 500mA and 700mA
- types with common plus and common minus connector available
- suitable for integration in luminaires or remote ceiling
- supply voltage 12V to 48V DC
- output voltage up to 45VDC
- integrated short circuit protection
- low standby power consumption
- high efficiency
- configuration via PC-software DALI-Cockpit and DALI interface (e.g. DALI USB)
- user-friendly factory default settings



Specification, Characteristics

common plus connector (GP)

| type | DALI RGB 250mA GP | DALI RGB 350mA GP | DALI RGB 500mA GP | DALI RGB 700mA GP |
|----------------------------------|--------------------------|----------------------|----------------------|----------------------|
| article number | 86458913-250 | 86458913-350 | 86458913-500 | 86458913-700 |
| supply: V+, V- | | | | |
| type of input | supply, DC | | | |
| marking terminals | V+, V- | | | |
| supply voltage V_{in} | 12V DC ... 48V DC (SELV) | | | |
| max. input current I_{in_max} | 250mA | 350mA | 500mA | 700mA |
| rated power @12V | 3W | 4,2W | 6W | 8,4W |

| | | | | |
|---------------------------|---|-------|-----|-------|
| rated power @48V | 12W | 16,8W | 24W | 33,6W |
| standby power consumption | 180mW @12V | | | |
| power on behaviour | configurable via DALI: 0%-100% or last actual level | | | |

input: DA, DA

| | |
|-------------------------------|---|
| input type | DALI, control input |
| marking terminals | DA, DA |
| input voltage range | 9,5V ... 22,5V (according to IEC62386-101) |
| max. current consumption DALI | ≤ 2mA |
| overvoltage protection | 250V |
| number of DALI-addresses | operating mode DT8: 1 operating mode Colour&Dim: 2 |

input: N, SW&DIM2-1, SW&DIM2-2

| | |
|-----------------------------|---|
| Input type | SwitchDim2 control input |
| marking terminals | N; SW&DIM2-1 (DA); SW&DIM2-2 (DA) |
| number of inputs | 2 |
| input voltage | 230V AC ±10% |
| frequency of input voltage | 50Hz |
| control pulse length | short press: >40ms, long press: > 400ms |
| input resistance | 200kΩ |
| max. voltage between inputs | 230V AC |

output: LED+, R-, G-, B-

| | | | | |
|---|--|--------|-------|-------|
| output type | LED dimmer, constant current PWM | | | |
| marking terminals | LED+, R-, G-, B- | | | |
| number of outputs | 3 | | | |
| PWM frequency | FW: < 4.6: 122Hz/244Hz/488Hz/976Hz FW: ≥ 4.6: 250Hz/ 500Hz / 1kHz | | | |
| output voltage range V_{led} | 3V-45V (at 48V supply) | | | |
| max. output current per channel I_{led} | 250mA | 350mA | 500mA | 700mA |
| max. output power per channel @45V | 11,25W | 15,75W | 22,5W | 31,5W |
| overload protection | yes | | | |
| open circuit protection | yes | | | |
| short circuit protection | yes | | | |

insulation data

| | |
|------------------------------------|----------------------|
| impulse voltage category | II |
| pollution degree | 2 |
| rated insulation voltage | 250V |
| rated impulse withstanding voltage | 4kV |
| Isolation | |
| supply <-> output | no insulation |
| DALI/Sw&Dim2 <-> output/supply | reinforced isolation |
| DALI/Sw&Dim2 <-> housing | reinforced isolation |
| Insulation test voltage | 3000V a.c. |

environmental conditions

| | |
|---------------------------------------|-----------------|
| operational ambient temperature T_a | -20°C ... +60°C |
|---------------------------------------|-----------------|

| | |
|--|-----------------|
| storing and transportation temperature | -20°C ... +75°C |
| rel. humidity, none condensing | 15% ... 90% |

general data

| | |
|------------------------------|--|
| dimensions (l x w x h) | 120mm x 30mm x 22mm |
| mounting | remote ceiling, integration in class II luminaires |
| rated maximum temperature tc | 75°C |
| expected lifetime (T<Tc) | 100.000h |
| housing material | PC, class V0 |
| protection class | II in intended use |
| protection degree housing | IP40 |
| protection degree terminals | IP20 |

terminals: V+, V-

| | |
|----------------------------------|--|
| connection type | spring terminal connector (cage clamp) |
| wire size solid core | 0,08 ... 2,5 mm ² (AWG28 ... AWG12) |
| wire size fine wired | 0,08 ... 2,5 mm ² (AWG28 ... AWG12) |
| wire size using wire end ferrule | 0,25 ... 1 mm ² |
| stripping length | 5 ... 6 mm / 0,2 ... 0,24 inch |
| housing material | PA66, class V0 |
| actuation type | operating tool |


terminals: DA, DA, N, LED+, R-, G-, B-

| | |
|----------------------------------|--|
| connection type | spring terminal connector (push in cage clamp) |
| wire size solid core | 0,2 ... 1,5 mm ² (AWG24 ... AWG16) |
| wire size fine wired | 0,2 ... 1,5 mm ² (AWG24 ... AWG16) |
| wire size using wire end ferrule | 0,25 ... 1 mm ² |
| stripping length | 8,5 ... 9,5 mm / 0,33 ... 0,37 inch |
| housing material | PA66, class V0 |
| actuation type | push button |

standards

| | |
|-------------------|--|
| DALI | EN 62386-101, EN 62386-102, EN 62386-207 |
| EMC | EN 61547 EN 55015 / IEC CISPR15 |
| electrical safety | EN 61347-2-13 EN 61357-1 |
| performance | EN 62384 |
| markings | CE, UKCA, DALI-2 |

on request: output currents from 100mA to 700mA available

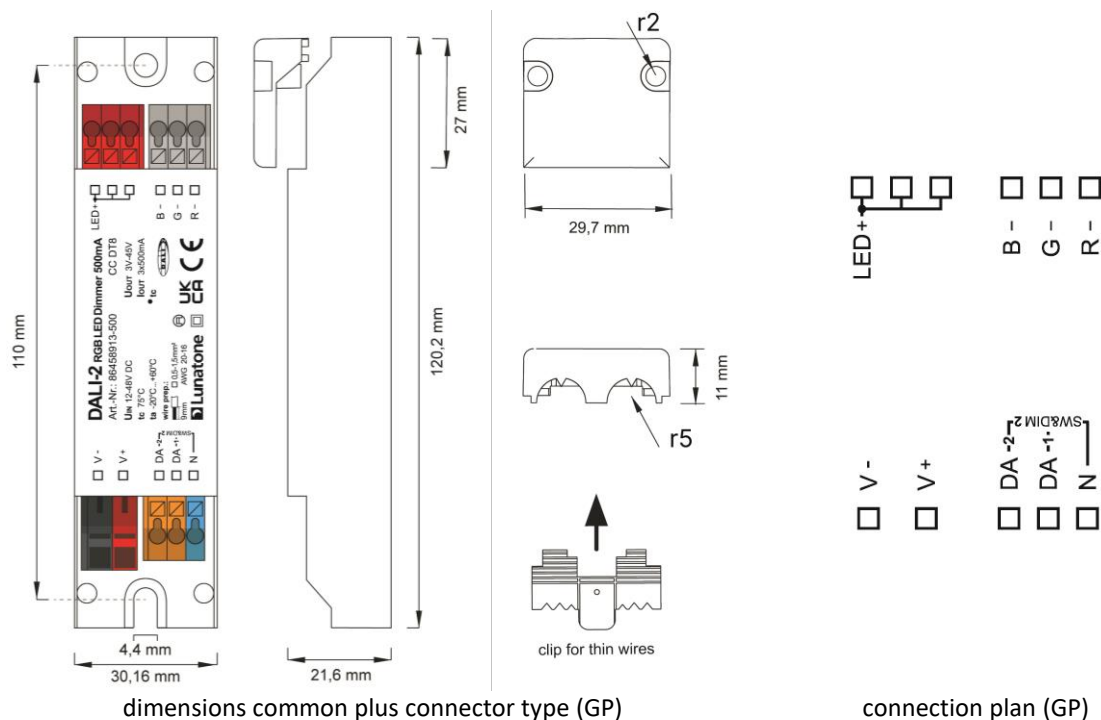

common minus connector (GM)

| type | DALI RGB 250mA GM | DALI RGB 350mA GM | DALI RGB 500mA GM | DALI RGB 700mA GM |
|----------------|----------------------|----------------------|----------------------|----------------------|
| article number | 86458913- 250GM | 86458913- 350GM | 86458913- 500GM | 86458913- 700GM |

supply: V+, V-

| | | | | |
|----------------------------------|---|-------|-------|-------|
| type of input | supply, DC | | | |
| marking terminals | V+, V- | | | |
| supply voltage V_{in} | 12V DC ... 48V DC (SELV) | | | |
| max. input current I_{in_max} | 250mA | 350mA | 500mA | 700mA |
| rated power @12V | 3W | 4,2W | 6W | 8,4W |
| rated power @48V | 12W | 16,8W | 24W | 33,6W |
| standby power consumption | 180mW @12V | | | |
| power on behaviour | configurable via DALI: 0%-100% or last actual level | | | |

input: DA, DA

| | |
|-------------------------------|---|
| input type | DALI, control input |
| marking terminals | DA, DA |
| input voltage range | 9,5V ... 22,5V (according to IEC62386-101) |
| max. current consumption DALI | $\leq 2\text{mA}$ |
| overvoltage protection | 250V |
| number of DALI-addresses | operating mode DT8: 1 operating mode Colour&Dim: 2 |

input: N, SW&DIM2-1, SW&DIM2-2

| | |
|-------------------|-----------------------------------|
| input type | SwitchDim2 control input |
| marking terminals | N; SW&DIM2-1 (DA); SW&DIM2-2 (DA) |

| | | | | |
|--|--|--------|-------|-------|
| number of inputs | 2 | | | |
| input voltage | 230V AC ±10% | | | |
| frequency of input voltage | 50Hz | | | |
| control pulse length | short press: >40ms, long press: > 400ms | | | |
| input resistance | 200kΩ | | | |
| max. voltage between inputs | 230V AC | | | |
| output: LED-, R+, G+, B+ | | | | |
| output type | LED dimmer, constant current PWM | | | |
| marking terminals | LED-, R+, G+, B+ | | | |
| number of outputs | 3 | | | |
| PWM frequency | FW: < 4.6: 122Hz/244Hz/488Hz/976Hz FW: ≥ 4.6: 250Hz/ 500Hz / 1kHz | | | |
| output voltage range V _{led} | 3V-45V (at 48V supply) | | | |
| max. output current per channel I _{led} | 250mA | 350mA | 500mA | 700mA |
| max. output power per channel @45V | 11,25W | 15,75W | 22,5W | 31,5W |
| overload protection | yes | | | |
| open circuit protection | yes | | | |
| short circuit protection | yes | | | |
| insulation data | | | | |
| impulse voltage category | II | | | |
| pollution degree | 2 | | | |
| rated insulation voltage | 250V | | | |
| rated impulse withstanding voltage | 4kV | | | |
| Isolation | | | | |
| supply <-> output | no insulation | | | |
| DALI/Sw&Dim2 <-> output/supply | reinforced isolation | | | |
| DALI/Sw&Dim2 <-> housing | reinforced isolation | | | |
| Insulation test voltage | 3000V a.c. | | | |
| environmental conditions | | | | |
| operational ambient temperature Ta | -20°C ... +60°C | | | |
| storing and transportation temperature | -20°C ... +75°C | | | |
| rel. humidity, none condensing | 15% ... 90% | | | |
| general data | | | | |
| dimensions (l x w x h) | 120mm x 30mm x 22mm | | | |
| mounting | remote ceiling, integration in class II luminaires | | | |
| rated maximum temperature tc | 75°C | | | |
| expected lifetime (T<Tc) | 100.000h | | | |
| housing material | PC, class V0 | | | |
| protection class | II in intended use | | | |
| protection degree housing | IP40 | | | |
| protection degree terminals | IP20 | | | |
| terminals: V+, V- | | | | |
| connection type | spring terminal connector (cage clamp) | | | |

| | |
|----------------------------------|--|
| wire size solid core | 0,08 ... 2,5 mm ² (AWG28 ... AWG12) |
| wire size fine wired | 0,08 ... 2,5 mm ² (AWG28 ... AWG12) |
| wire size using wire end ferrule | 0,25 ... 1 mm ² |
| stripping length | 5 ... 6 mm / 0,2 ... 0,24 inch |
| housing material | PA66, class V0 |
| actuation type | operating tool |


terminals: DA, DA, N, LED-, R+, G+, B+

| | |
|----------------------------------|--|
| connection type | spring terminal connector (push in cage clamp) |
| wire size solid core | 0,2 ... 1,5 mm ² (AWG24 ... AWG16) |
| wire size fine wired | 0,2 ... 1,5 mm ² (AWG24 ... AWG16) |
| wire size using wire end ferrule | 0,25 ... 1 mm ² |
| stripping length | 8,5 ... 9,5 mm / 0,33 ... 0,37 inch |
| housing material | PA66, class V0 |
| actuation type | push button |

standards

| | |
|-------------------|--|
| DALI | EN 62386-101, EN 62386-102, EN 62386-207 |
| EMC | EN 61547 EN 55015 / IEC CISPR15 |
| electrical safety | EN 61347-2-13 EN 61357-1 |
| performance | EN 62384 |
| markings | CE, UKCA, DALI-2 |

on request: output currents from 100mA to 700mA available

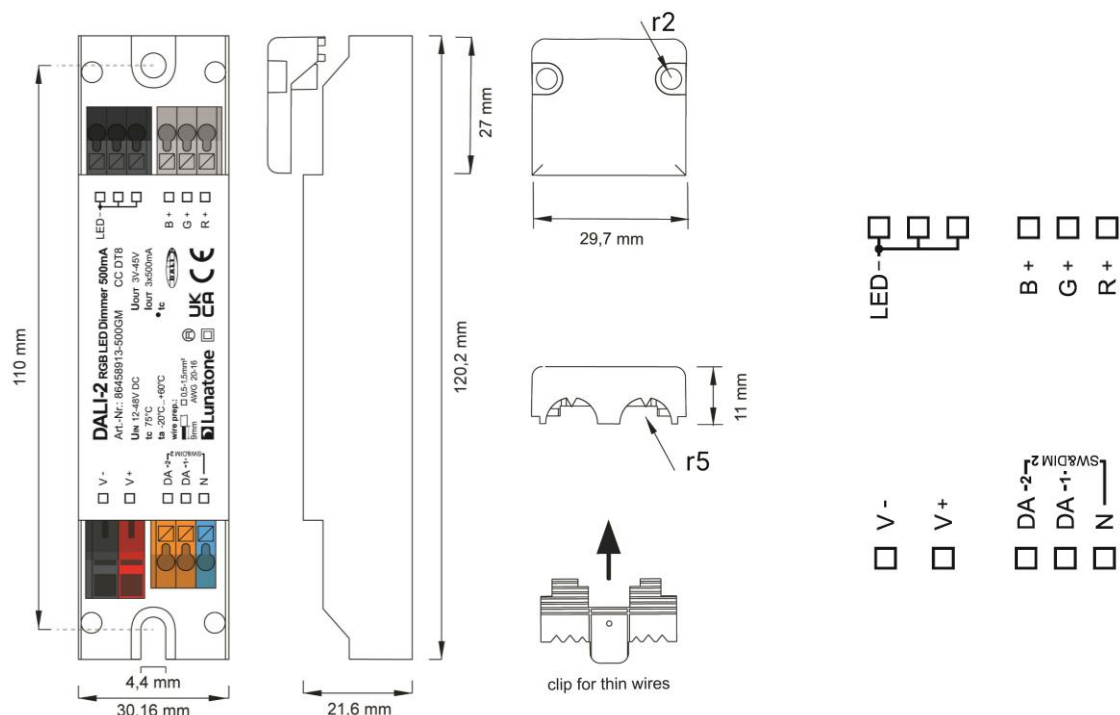

dimensions common minus connector type (GM)

connection plan (GM)

Installation

- The DALI RGB LED Dimmer is an independent control gear, it is suitable for remote ceiling and integration in luminaires. Ensure proper working cable relief for installation in protection class II equipment
- The wiring should be carried out as a permanent installation in a dry and clean environment.
- Installation may only be carried out in a voltage-free state of the system and by qualified specialists.
- National regulations for setting up electrical systems must be followed.
- Connect the terminals V+ and V- only to a DC supply voltage of category SELV (Safety Extra Low Voltage)
- the connection to the DALI-line (DA,DA) is polarity free
- If used in Sw&Dim2 mode for both inputs the same phase have to be used.
- The DALI-interface can handle mains voltage, protecting the device in case wrong wiring.

- Wiring topology of the DALI-line: line, tree, star.
- Connect only one wire on each terminal, if twin ferrules are used take care to the maximum wire size.
- The DALI wiring can be realised with standard low-voltage installation material. No special cables are required.
- The DALI line may be routed together with the mains voltage (in one cable or as single wires in a tube).



Attention: The DALI-signal is not classified as SELV circuit (Safety Extra Low Voltage). Therefore, the installation regulations for low voltage apply




The voltage drop on the DALI line must not exceed 2V at maximum length (300m) and maximum bus load (250mA).



Hint:

For highest efficiency the input voltage should range between 3V and 10V above the LED-voltage:

4-6 LEDs: 24V
6-9LEDs: 36V
10-12 LEDs: 48V

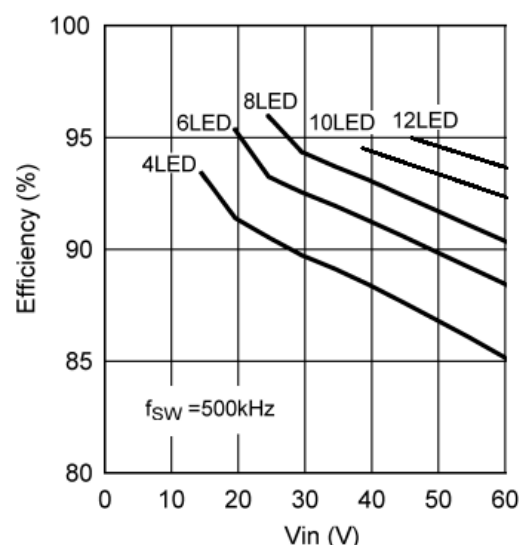

Operating Modes

The device offers several operating modes:

DT8 (factory default)

In this operating mode one DALI-address for the independent control of light level and colour is used (Device Type 8, RGBWAF). From FW version 4.6 on Lunatone LED Dimmer are DALI 2 compatible and support DALI 2 commands.

SwitchDim2: alternatively, the device can be controlled using 2 switch-inputs for mains voltage (SwitchDim2):

SW&DIM2-1: light level
 short press: On/Off
 long press: dimming

SW&DIM2-2: colour
 long press: change colour

Colour&Dim


This operating mode is suitable for operating RGB—luminaires. Two DALI-addresses are used, the first to control the light level and the second for changing the distribution on the output channels (e.g. for colour adjustments).

The Colour&Dim mode allows colour adjustments without affecting the level and vice versa. For each channel only DALI-standard commands like dim up/down but also DAP are used. Thus, the device can be used with all common controls and gateways (e.g. KNX). The Colour&Dim mode provides an alternative to the DT8-RGBWAF mode.

Can be operated via DALI or SwitchDim2:

DALI-address 1, SW&DIM2-1: light level


DALI-address 2, SW&DIM2-2: colour

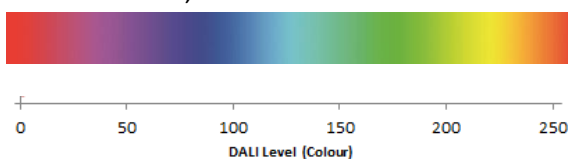

Selection of operating mode

With the help of the PC-software tool DALI-Cockpit the operating mode can be easily set on the general settings page.

Operating mode DT8-RGBWAF:

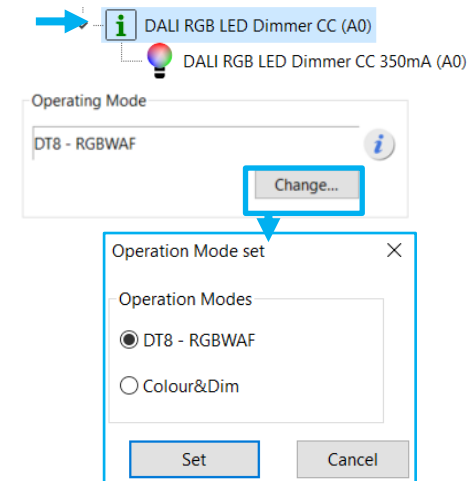

Switching between operating modes can also be done with the help of the DALI-command SET OPERATING MODE (IEC 62386-102 Ed.2). When changing the operating mode, the number of used DALI-addresses can change as well, and this requires a new addressing procedure. In the DALI-Cockpit this address assignment is performed automatically.

Operating Mode:

| number | operating mode |
|--------|-----------------------|
| 0x0 | DT8 (factory default) |
| 0x92 | DT8 |
| 0x93 | Colour&Dim |

DALI Cockpit: General Settings

On the overview page respective control elements are available for each operating mode

- *DT8*: 2 sliders, one for level and one for colour
- *Colour&Dim*: 2 sliders, one for level and one for colour

Additionally the following configurations can be made:

PWM Frequency

The PWM frequency can be selected:
122Hz / 244Hz / 488Hz / 976Hz.
From FW version 4.6 changed PWM frequencies: 250Hz / 500Hz / 1kHz.

Ignore Broadcast Commands

The broadcast control of each channel can be deactivated individually. Through selection of "Ignore Broadcast", the respective channel does no longer respond to broadcast commands on the DALI bus (group assignments are not ignored).

Adjustable RESET behaviour

From FW 4.6. on the response to a DALI reset command is configurable. The following options are available:

- *Ignore command*: the DALI reset command does not trigger any changes to the device settings.
- *DALI standard*: the selected device settings are reset to the values defined in

the DALI standard (see table 1 below - second column: DALI standard values)

- *Custom settings*: the current device settings can be saved. With a DALI Reset command, the selected parameters (6 check boxes) are then reset to these saved values.

Calibration - light adjustment

The dimming range reaches from 0.1% to 100%. From FW version 4.6 on, it is possible to calibrate different light sources, with the option: "LED Calibration".

For each channel, the MIN level (default: 0.1%) an intermediate value (default: 33%) and the MAX level (default: 100%) can be adjusted and matched between light sources.

To do this, the desired level with the upper slider needs to be set. Apply the value and start the fine adjustment by pressing the button next to it. The appropriate fine adjustments can now be made with the calibration slider below. See also Figure 1

Overview page operating mode DT8

Device Parameters

Operating Mode: DT8 - RGB [Change...]

PWM Frequency: max. efficiency (~250Hz) [LED Calibration...]

Ignore Broadcast Config and Arc commands: ☐ Ignore Broadcast commands [i]

Output Mode: All Channels Normalized

Behavior on DALI Reset Command: Parameters are reset to DALI Standard values. [Change...]

Intensity Control (A1): [Slider] 0% [Set]

RGB Colour Control (A1): [Slider] 254,0,0 [Set]

Overview page operating mode Colour&Dim

Device Parameters

Operating Mode: Colour&Dim [Change...]

PWM Frequency: max. efficiency (~250Hz) [LED Calibration...]

Ignore Broadcast Config and Arc commands: ☐ Control Gear 1 ☐ Control Gear 2 [i]

Behavior on DALI Reset Command: Parameters are reset to DALI Standard values. [Change...]

Intensity Control (A0): [Slider] 0% [Set]

Colour Control (A1): [Slider] 0.00% [Set]


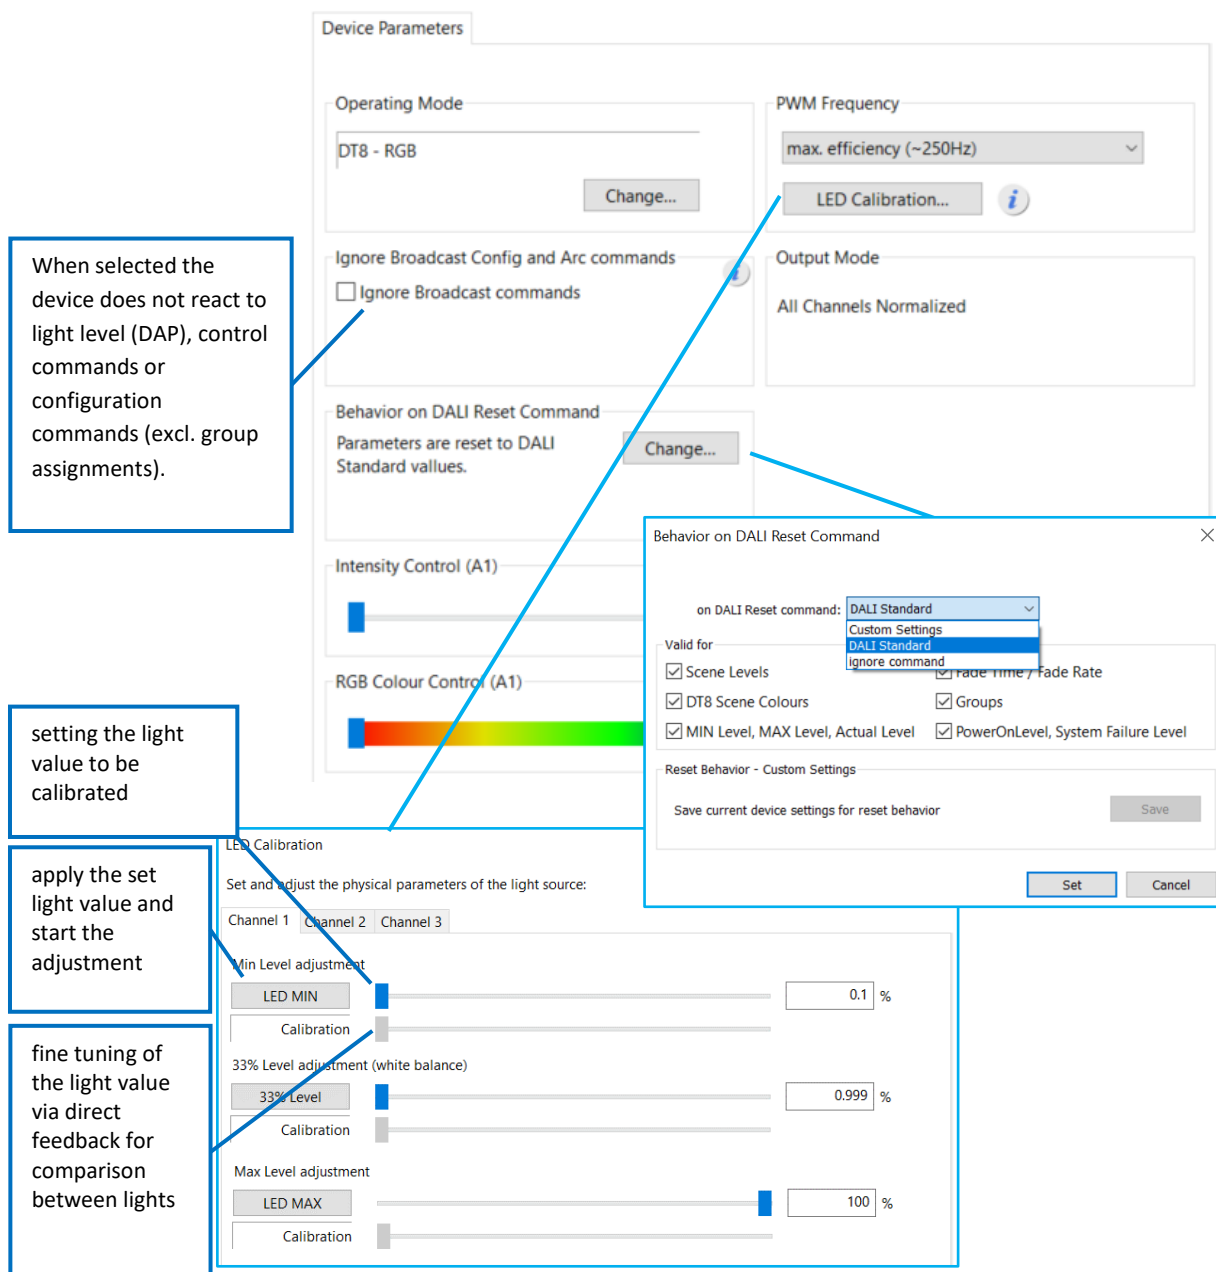


Figure 1 Cockpit overview page – LED calibration and settable RESET behaviour

DALI Cockpit: Additional Settings

Besides the settings on the general page each channel can be selected separately in the component tree for individual configuration.



For each address the group membership can be set as well as scene values and DALI-


parameters. In Colour&Dim operating mode, all values assigned to channel 2 are representing colours.

Figure 2 on page 14 shows the settings for for operating mode DT8.


Figure 3 on page 14 shows the settings for each channel for operating mode Colour&Dim.

Scene settings



Via the arrow button the scene settings can be imported and exported.




Via the button „Preferences“ the default scene settings can be loaded.

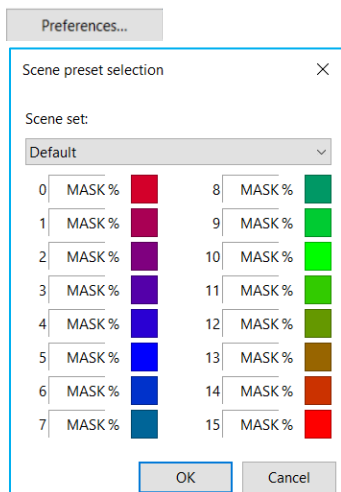


From FW 6.0 on, extended scene settings can be configured. With extended scenes it is possible to automatically change between 2 scene values (once or looped). Thereby enabling configuration of blinking lights, time delayed switch off or light repetitions, as well as traveling lights with multiple dimmers.

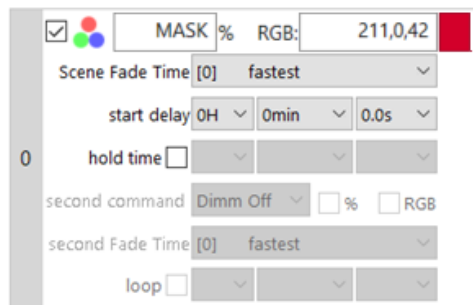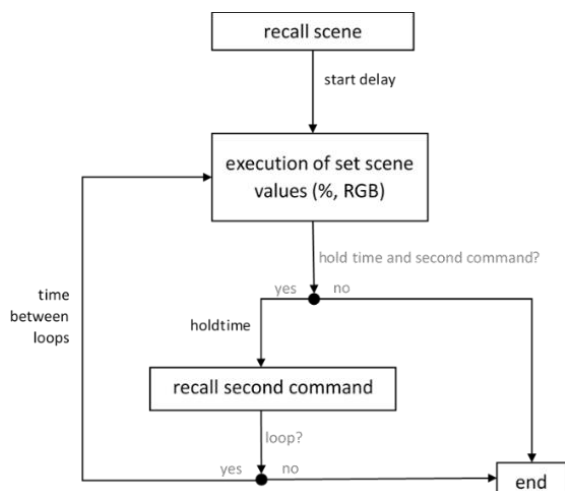

Extended Scenes are available for each of the 16 scenes on the second tab:





By enabling the extended scenes these are used instead of the standard scenes on the “Device Parameters” tab



Import/Export settings

With a right click on the channel in the device-tree overview the device settings can be exported or imported.

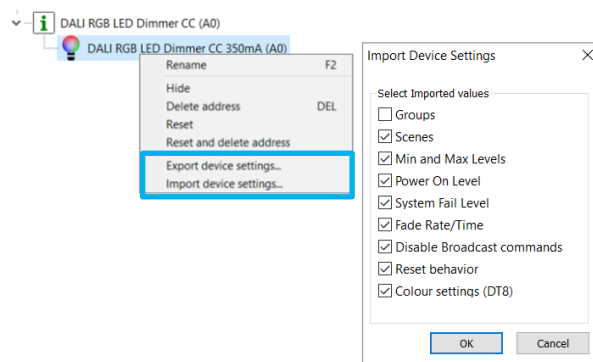



Actual Level: 0%

ON (MAX) OFF

MIN

Set Act Level

0 %

Set

Set Colour

RGB 254,0,0

Set

Device Info

Name DALI RGB LED Dimmer C... Article Number 86458913-250GM GTIN

Manufacturer Lunatone Serial Number 107 FW 4.2.2

Device Type 8 Type Control Gear

DALI Ver V2.0 Short Address (A7) DALI RGB LED Dimmer CC 2! Set

Device Parameters

Groups

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

DALI Parameter

MIN Level: 0.1 %

MAX Level: 100 %

Power On Level: 100 %

Power On Colour RGB: MASK

System Fail Level: 100 %

System Fail Colour RGB: MASK

Fade time no fade s


Fade rate 44.7 step/s

Scenes

Preferences...

| | | | | | | | | | |
|---|-------------------------------------|------|---|----------------|----|-------------------------------------|------|---|----------------|
| 0 | <input checked="" type="checkbox"/> | MASK | % | RGB: 211,0,42 | 8 | <input checked="" type="checkbox"/> | MASK | % | RGB: 0,152,101 |
| 1 | <input checked="" type="checkbox"/> | MASK | % | RGB: 169,0,84 | 9 | <input checked="" type="checkbox"/> | MASK | % | RGB: 0,203,50 |
| 2 | <input checked="" type="checkbox"/> | MASK | % | RGB: 127,0,127 | 10 | <input checked="" type="checkbox"/> | MASK | % | RGB: 0,254,0 |
| 3 | <input checked="" type="checkbox"/> | MASK | % | RGB: 84,0,169 | 11 | <input checked="" type="checkbox"/> | MASK | % | RGB: 50,203,0 |
| 4 | <input checked="" type="checkbox"/> | MASK | % | RGB: 42,0,211 | 12 | <input checked="" type="checkbox"/> | MASK | % | RGB: 101,152,0 |
| 5 | <input checked="" type="checkbox"/> | MASK | % | RGB: 0,0,254 | 13 | <input checked="" type="checkbox"/> | MASK | % | RGB: 152,101,0 |
| 6 | <input checked="" type="checkbox"/> | MASK | % | RGB: 0,50,203 | 14 | <input checked="" type="checkbox"/> | MASK | % | RGB: 203,50,0 |
| 7 | <input checked="" type="checkbox"/> | MASK | % | RGB: 0,101,152 | 15 | <input checked="" type="checkbox"/> | MASK | % | RGB: 254,0,0 |

Figure 2 Cockpit settings for DT8



Actual Level: 0%

ON (MAX) OFF

MIN

Set Act Level

0 %

Set

Device Info

Name DALI RGB LED Dimmer C... Article Number 86458913-500 GTIN

Manufacturer Lunatone Serial Number 105 FW 4.2.2

Device Type 6 Type Control Gear

DALI Ver V2.0 Short Address (A7) DALI RGB LED Dimmer CC 5! Set

Device Parameters

Groups

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

DALI Parameter

MIN Level: 0.1 %

MAX Level: 100 %

Power On Level: 100 %

System Fail Level: 100 %

Fade time no fade s

Fade rate 44.7 step/s

Scenes

Preferences...

| | | | | | | | | | | | |
|---|-------------------------------------|-------|---|-------------------------------------|-------|----|-------------------------------------|-------|----|-------------------------------------|-------|
| 0 | <input checked="" type="checkbox"/> | 100 % | 4 | <input checked="" type="checkbox"/> | 100 % | 8 | <input checked="" type="checkbox"/> | 100 % | 12 | <input checked="" type="checkbox"/> | 100 % |
| 1 | <input checked="" type="checkbox"/> | 0 % | 5 | <input checked="" type="checkbox"/> | 100 % | 9 | <input checked="" type="checkbox"/> | 0 % | 13 | <input checked="" type="checkbox"/> | 100 % |
| 2 | <input checked="" type="checkbox"/> | 0 % | 6 | <input checked="" type="checkbox"/> | 100 % | 10 | <input checked="" type="checkbox"/> | 0 % | 14 | <input checked="" type="checkbox"/> | 100 % |
| 3 | <input checked="" type="checkbox"/> | 0 % | 7 | <input checked="" type="checkbox"/> | 0 % | 11 | <input checked="" type="checkbox"/> | 0 % | 15 | <input checked="" type="checkbox"/> | 0 % |

Figure 3 Cockpit settings for each channel – Colour&Dim

















































Factory Default Settings

Before the initial addressing is performed, the device can already be controlled by a group address. This predefined grouping will be deleted during the first addressing procedure. Afterwards groups can be assigned as usual (e.g. with the help of the DALI-Cockpit). By sending a DALI-Reset command the device is

set to the DALI default values as defined in the standard.

The factory default values as well as the DALI-norm values are summarised in *Table 1* below.

Table 1 factory default settings column 1, DALI Standard settings column 2

| | Delivery default | DALI norm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|-------------------------|-----|-----|-----|---|---|--|---------------------------------------|------|---|-----|---|----|---|---------------------------------------|------|---|-----|---|----|---|---------------------------------------|------|---|-----|---|-----|---|---------------------------------------|------|---|----|---|-----|---|---------------------------------------|------|---|----|---|-----|---|---------------------------------------|------|---|---|---|-----|---|---------------------------------------|------|---|---|----|-----|---|---------------------------------------|------|---|---|-----|-----|---|---------------------------------------|------|---|---|-----|-----|---|---------------------------------------|------|---|---|-----|----|---|--|------|---|---|-----|---|---|--|------|---|----|-----|---|---|--|------|---|-----|-----|---|---|--|------|---|-----|-----|---|---|--|------|---|-----|----|---|---|--|------|---|-----|---|---|---|-----------------------|
| Operating mode | DT8 | N/A (remains unchanged) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SwitchDim2 | SW&DIM2-1: light level SW&DIM2-2: colour | N/A (remains unchanged) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Min Level | 0.1% | 0.1% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Max Level | 100% | 100% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PowerOn Level | Last light level (= MASK) | 100% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| System Failure Level | 100% | 100% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Fade Time | 1s [2] | none | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Fade Rate | 89.4 steps/s [5] | 44.7 steps/s | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PWM-Frequency | FW ≥ 4.6: 1kHz FW < 4.6: 122Hz | N/A (remains unchanged) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Control before initial addressing | G0 (or G0 and G1 in operating mode Colour&Dim) | None | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Scene values | <table><thead><tr><th></th><th></th><th></th><th>R</th><th>G</th><th>B</th><th></th></tr></thead><tbody><tr><td><input checked="" type="checkbox"/> 0</td><td>MASK</td><td>%</td><td>211</td><td>0</td><td>42</td><td></td></tr><tr><td><input checked="" type="checkbox"/> 1</td><td>MASK</td><td>%</td><td>169</td><td>0</td><td>84</td><td></td></tr><tr><td><input checked="" type="checkbox"/> 2</td><td>MASK</td><td>%</td><td>127</td><td>0</td><td>127</td><td></td></tr><tr><td><input checked="" type="checkbox"/> 3</td><td>MASK</td><td>%</td><td>84</td><td>0</td><td>169</td><td></td></tr><tr><td><input checked="" type="checkbox"/> 4</td><td>MASK</td><td>%</td><td>42</td><td>0</td><td>211</td><td></td></tr><tr><td><input checked="" type="checkbox"/> 5</td><td>MASK</td><td>%</td><td>0</td><td>0</td><td>254</td><td></td></tr><tr><td><input checked="" type="checkbox"/> 6</td><td>MASK</td><td>%</td><td>0</td><td>50</td><td>203</td><td></td></tr><tr><td><input checked="" type="checkbox"/> 7</td><td>MASK</td><td>%</td><td>0</td><td>101</td><td>152</td><td></td></tr><tr><td><input checked="" type="checkbox"/> 8</td><td>MASK</td><td>%</td><td>0</td><td>152</td><td>101</td><td></td></tr><tr><td><input checked="" type="checkbox"/> 9</td><td>MASK</td><td>%</td><td>0</td><td>203</td><td>50</td><td></td></tr><tr><td><input checked="" type="checkbox"/> 10</td><td>MASK</td><td>%</td><td>0</td><td>254</td><td>0</td><td></td></tr><tr><td><input checked="" type="checkbox"/> 11</td><td>MASK</td><td>%</td><td>50</td><td>203</td><td>0</td><td></td></tr><tr><td><input checked="" type="checkbox"/> 12</td><td>MASK</td><td>%</td><td>101</td><td>152</td><td>0</td><td></td></tr><tr><td><input checked="" type="checkbox"/> 13</td><td>MASK</td><td>%</td><td>152</td><td>101</td><td>0</td><td></td></tr><tr><td><input checked="" type="checkbox"/> 14</td><td>MASK</td><td>%</td><td>203</td><td>50</td><td>0</td><td></td></tr><tr><td><input checked="" type="checkbox"/> 15</td><td>MASK</td><td>%</td><td>254</td><td>0</td><td>0</td><td></td></tr></tbody></table> | | | | R | G | B | | <input checked="" type="checkbox"/> 0 | MASK | % | 211 | 0 | 42 |  | <input checked="" type="checkbox"/> 1 | MASK | % | 169 | 0 | 84 |  | <input checked="" type="checkbox"/> 2 | MASK | % | 127 | 0 | 127 |  | <input checked="" type="checkbox"/> 3 | MASK | % | 84 | 0 | 169 |  | <input checked="" type="checkbox"/> 4 | MASK | % | 42 | 0 | 211 |  | <input checked="" type="checkbox"/> 5 | MASK | % | 0 | 0 | 254 |  | <input checked="" type="checkbox"/> 6 | MASK | % | 0 | 50 | 203 |  | <input checked="" type="checkbox"/> 7 | MASK | % | 0 | 101 | 152 |  | <input checked="" type="checkbox"/> 8 | MASK | % | 0 | 152 | 101 |  | <input checked="" type="checkbox"/> 9 | MASK | % | 0 | 203 | 50 |  | <input checked="" type="checkbox"/> 10 | MASK | % | 0 | 254 | 0 |  | <input checked="" type="checkbox"/> 11 | MASK | % | 50 | 203 | 0 |  | <input checked="" type="checkbox"/> 12 | MASK | % | 101 | 152 | 0 |  | <input checked="" type="checkbox"/> 13 | MASK | % | 152 | 101 | 0 |  | <input checked="" type="checkbox"/> 14 | MASK | % | 203 | 50 | 0 |  | <input checked="" type="checkbox"/> 15 | MASK | % | 254 | 0 | 0 |  | All scene values MASK |
| | | | R | G | B | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <input checked="" type="checkbox"/> 0 | MASK | % | 211 | 0 | 42 |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <input checked="" type="checkbox"/> 1 | MASK | % | 169 | 0 | 84 |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <input checked="" type="checkbox"/> 2 | MASK | % | 127 | 0 | 127 |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <input checked="" type="checkbox"/> 3 | MASK | % | 84 | 0 | 169 |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <input checked="" type="checkbox"/> 4 | MASK | % | 42 | 0 | 211 |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <input checked="" type="checkbox"/> 5 | MASK | % | 0 | 0 | 254 |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <input checked="" type="checkbox"/> 6 | MASK | % | 0 | 50 | 203 |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <input checked="" type="checkbox"/> 7 | MASK | % | 0 | 101 | 152 |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <input checked="" type="checkbox"/> 8 | MASK | % | 0 | 152 | 101 |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <input checked="" type="checkbox"/> 9 | MASK | % | 0 | 203 | 50 |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <input checked="" type="checkbox"/> 10 | MASK | % | 0 | 254 | 0 |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <input checked="" type="checkbox"/> 11 | MASK | % | 50 | 203 | 0 |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <input checked="" type="checkbox"/> 12 | MASK | % | 101 | 152 | 0 |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <input checked="" type="checkbox"/> 13 | MASK | % | 152 | 101 | 0 |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <input checked="" type="checkbox"/> 14 | MASK | % | 203 | 50 | 0 |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <input checked="" type="checkbox"/> 15 | MASK | % | 254 | 0 | 0 |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Behaviour on DALI RESET command | set DALI Standard values, see column 2 | N/A (remains unchanged) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

All scene values MASK

Purchase Order Information

Art.Nr. 86458913-xxx:

DALI RGB LED Dimmer CC
constant current xxx mA - 100mA-700mA,
common plus connector,
supply 12V-48V DC,
output voltage 3V-45V DC,
SwitchDim2,
remote ceiling & integration in luminaires

Art.Nr. 86458913-xxxGM:

DALI RGB LED Dimmer CC
constant current xxx mA - 100mA-700mA,
common minus connector,
supply 12V-48V DC,
output voltage 3V-45V DC,
SwitchDim2,
remote ceiling & integration in luminaires

Additional Information and Equipment

Lunatone datasheets and manuals

<https://www.lunatone.com/en/downloads-a-z/>

Lunatone DALI products

<https://www.lunatone.com/en/>

DALI-Cockpit – free configuration tool from
Lunatone for DALI systems

<https://www.lunatone.com/en/product/dali-cockpit/>

Contact

Technical Support: support@lunatone.com

Requests: sales@lunatone.com

www.lunatone.com



Disclaimer

Subject to change. Information provided without guarantee.
The datasheet refers to the current delivery.

The compatibility with other devices must be tested in advance
to the installation.