














Type	Manual	Manual Start	(15) TEST
ECO	Monthly : 1 min Annually : Rated duration		
Type	Automatic Test	Manual Start	(16) TEST
AT(Automatic Test)	Function test :Every 7 Days		<1mm <1sec
DALI (DALI)	Duration Test :Annually		
Green LED		Status	
		System OK	
		Duration Test	
		Function Test	
		Inhibit Mode (DALI models) (Switching into DALI Inhibit Mode via controller)	
Red LED		Status	
		Led Module Failure 	
		Battery disconnected 	
		Battery failure 	
Green Led and Red Led On		Status	
		Battery operation (Emergency Mode) or after Rest Mode (DALI models)	
		Address Identification Mode (DALI models)	

Dimensions (mm)

Material : PC (Polycarbonate)
Color : White



Time Selection :

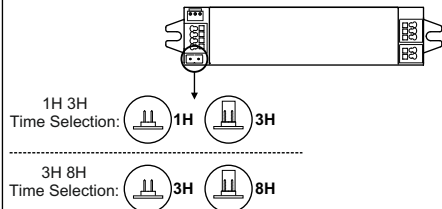

To access the mounting height table, please visit the website linked below or scan the QR code.



<https://ecelelectronics.com.tr/en/products/emergency-luminaires/astralite>

MAN-ASTRALITE_R2531

ASTRALITE Emergency Luminaire Recessed Mounted



Escape Route
Lighting Lens



Open Area (Antipanic)
Lighting Lens

220-240V 50/60Hz	NM	1H-3H 3H-8H	MAX 220 Lm	6500 K	t _a 0-45°C	LED	IP30		2.5 mm ²	Li-Fe PO4	
---------------------	----	----------------	---------------	-----------	--------------------------	-----	------	---	------------------------	--------------	---

Code	Function	Battery	1H Light Output	3H Light Output	8H Light Output
ASL-10E-XX	ECO	3.2V 1.0Ah Li-FePO4	220 Lm	90 Lm	-
ASL-16E-XX	ECO	3.2V 1.6Ah Li-FePO4	220 Lm	140 Lm	-
ASL-20E-XX	ECO	3.2V 2.0Ah Li-FePO4	220 Lm	180 Lm	-
ASL-32E-XX	ECO	3.2V 3.2Ah/3.8Ah Li-FePO4	-	220 Lm	100 Lm
ASL-10AT-XX	Auto Test	3.2V 1.0Ah Li-FePO4	220 Lm	90 Lm	-
ASL-16AT-XX	Auto Test	3.2V 1.6Ah Li-FePO4	220 Lm	140 Lm	-
ASL-20AT-XX	Auto Test	3.2V 2.0Ah Li-FePO4	220 Lm	180 Lm	-
ASL-32AT-XX	Auto Test	3.2V 3.2Ah/3.8Ah Li-FePO4	-	220 Lm	100 Lm
ASL-16DALI-XX	DALI	3.2V 1.6Ah Li-FePO4	-	140 Lm	-
ASL-20DALI-XX	DALI	3.2V 2.0Ah Li-FePO4	-	180 Lm	-
ASL-32DALI-XX	DALI	3.2V 3.2Ah/3.8Ah Li-FePO4	-	220 Lm	-
ASL-16LUM-XX	Wireless-Luminula	3.2V 1.6Ah Li-FePO4	-	140 Lm	-
ASL-CBE-XX	Central-ECO	-	-	220 Lm	-
ASL-CB-DALI-XX	Central-DALI2	-	-	220 Lm	-

XX: AP - Open Area (Antipanic) Lighting Lens , ER - Escape Route Lighting Lens

