



Battery Change ()


12a

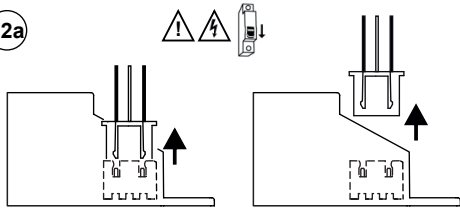


12b



12c

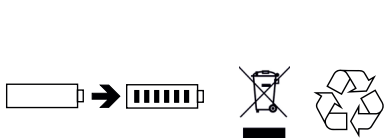

12d

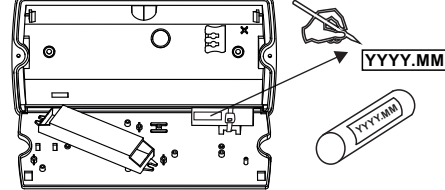

13a ELGSXX-E (Manual Test) Models

Function Test : Every month, 60 seconds
Duration Test : Every year, rated duration

Green Led Always ON		System OK, AC Mode
Green Led Always OFF		Emergency Mode, Test Mode, Battery disconnected

13b ELGSXX-AT(Automatic Test) & ELGSXX-DALI (DALI) Models

Green LED	Status
	 System OK, AC Mode
	 Function Test underway (60 seconds every week automatically or by pressing Test Button min 1 sec)
	 Duration Test underway (every year once automatically or by pressing Test Button min 5 sec)
	 Inhibit Mode (DALI models) (Switching into DALI Inhibit Mode via controller)
Red LED	Status
	 LED Module Failure (Open circuit or short circuit)
	 Battery Failure (Battery failed on the Duration Test or Function Test)
	 Battery Failure (Battery disconnected)
Green LED and Red LED	Status
	 Address Identification Mode (DALI models)
	 Battery operation (Emergency Mode) or after Rest Mode (DALI models)

MAN-ELGS_R2418


ELEGANCE SLIM

Emergency Luminary & Exit Sign Installation Instructions





	M/NM	1H/3H 3H/8H	ECO	AUTO TEST	DALI		Li-Fe PO4	IP65 IK08		t _a 0/+40°C		2.5mm ²		
--	------	----------------	-----	--------------	------	--	--------------	--------------	--	---------------------------	--	--------------------	--	--

Code	Type	Battery (Li-FePO4)	Duration & Lumen Outputs
ELGS10-E ELGS16-E ELGS20-E ELGS32-E	Manual Test Manual Test Manual Test Manual Test	3.2V - 1.0Ah 3.2V - 1.6Ah 3.2V - 2.0Ah 3.2V - 3.2Ah	1H: 270 Lumen 3H: 90 Lumen 1H: 270 Lumen 3H: 140 Lumen 1H: 270 Lumen 3H: 185 Lumen 3H: 270 Lumen 8H: 100 Lumen
ELGS10-AT ELGS16-AT ELGS20-AT ELGS32-AT	Auto Test Auto Test Auto Test Auto Test	3.2V - 1.0Ah 3.2V - 1.6Ah 3.2V - 2.0Ah 3.2V - 3.2Ah	1H: 270 Lumen 3H: 90 Lumen 1H: 270 Lumen 3H: 140 Lumen 1H: 270 Lumen 3H: 185 Lumen 3H: 270 Lumen 8H: 100 Lumen
ELGS16-DALI ELGS20-DALI ELGS32-DALI	DALI 2 DALI 2 DALI 2	3.2V - 1.6Ah 3.2V - 2.0Ah 3.2V - 3.2Ah	3H: 140 Lumen 3H: 185 Lumen 3H: 270 Lumen
ELGS16-LUM	Wireless	3.2V - 1.6Ah	3H: 140 Lumen
ELGS-CBE ELGS-CBDALI	Central Eco Central DALI	- -	270 Lumen 270 Lumen




285


1




2

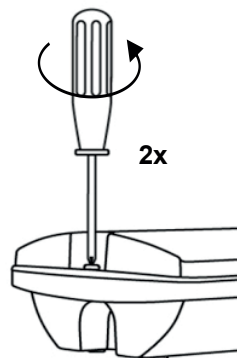


3

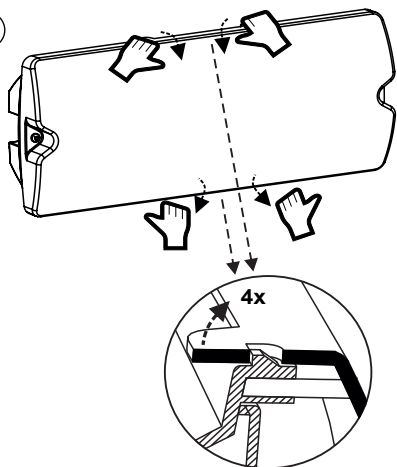


4

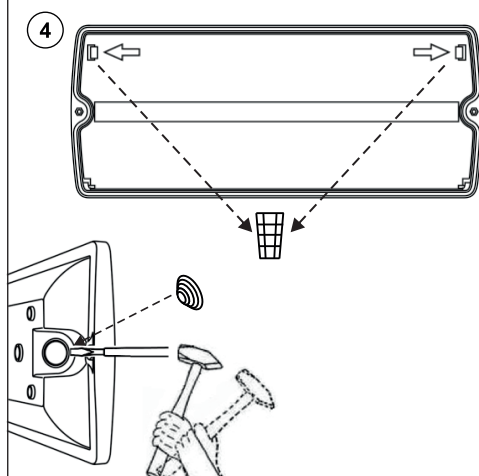

5

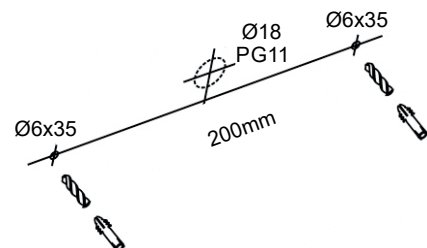


6

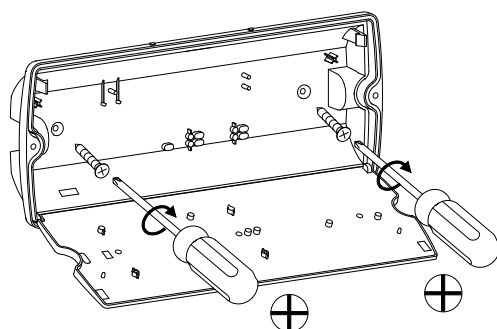


7

8-9mm
0.75 -2.5mm²




Up to 2 x 2.5 mm² per connector pole


7a ECO /Auto Test /LUMINULA




7b DALI



7c Central Battery System (CBS)




7d Central Battery System (CBS) DALI




8


ECO / Auto Test / DALI / LUMINULA

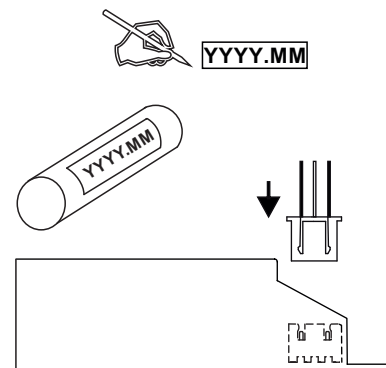

9

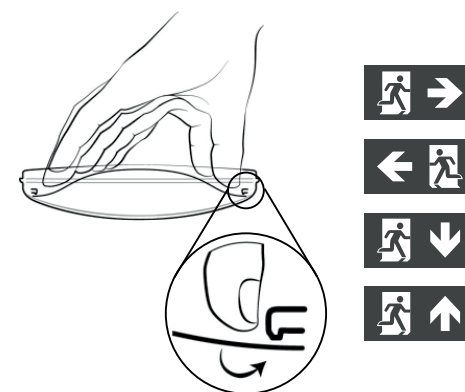

10

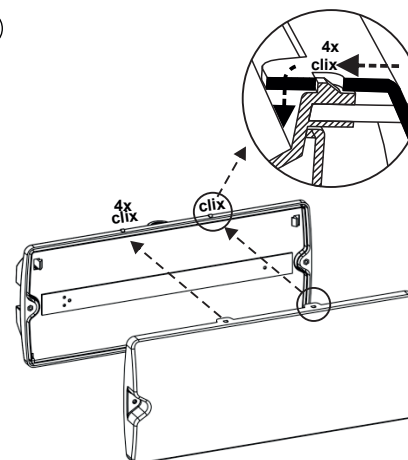

11

