


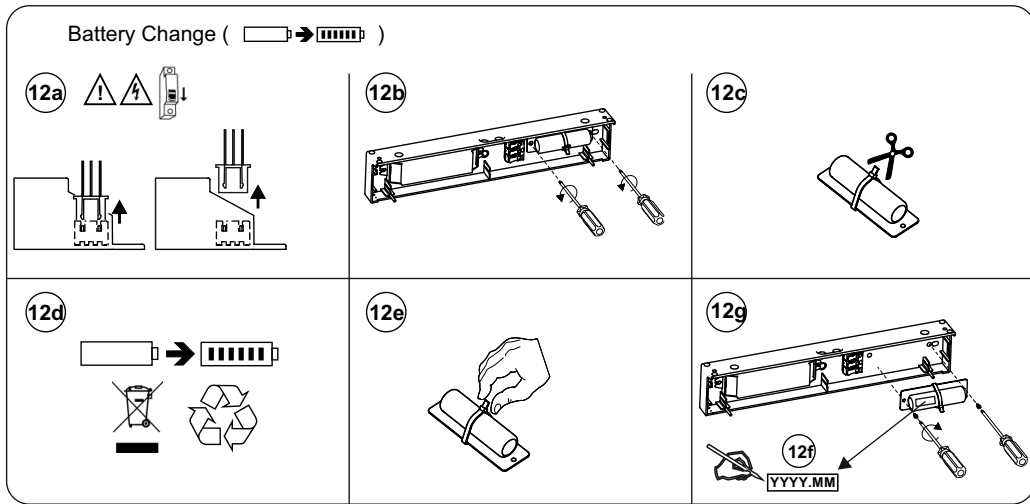

13a MTLXX-E (Manual Test) Models Function Test : Every month, 60 seconds Duration Test : Every year, rated duration	Green Led Always ON		System OK, AC Mode
	Green Led Always OFF		Emergency Mode, Test Mode, Battery disconnected

13b MTLXX-AT(Automatic Test) & MTLXX-DALI (DALI) Models	
Green LED	Status
	System OK, AC Mode
	Function Test underway (60 seconds every week automatically or by pressing Test Button min 1 sec)
	Duration Test underway (every year once automatically or by pressing Test Button min 5 sec)
	Inhibit Mode (DALI models) (Switching into DALI Inhibit Mode via controller)
Red LED	Status
	LED Module Failure (Open circuit or short circuit)
	Battery Failure (Battery failed on the Duration Test or Function Test)
	Battery Failure (Battery disconnected)
Green LED and Red LED	Status
	Address Identification Mode (DALI models)
	Battery operation (Emergency Mode) or after Rest Mode (DALI models)

MAN-MTL30_R2420


MULTILITE 30

Emergency Luminary & Exit Sign Installation Instructions





	M/NM	1H/3H 3H/8H	ECO	AUTO TEST	DALI	30m	Li-Fe PO4	IP40 IK03		t _a 0/+40°C	2.5mm ²		
--	------	----------------	-----	--------------	------	-----	--------------	--------------	--	---------------------------	--------------------	--	--


Code	Type	Battery
MTL30-10E	Manual Test	3.2V - 1.0Ah Li-FePO4
MTL30-16E	Manual Test	3.2V - 1.6Ah Li-FePO4
MTL30-20E	Manual Test	3.2V - 2.0Ah Li-FePO4
MTL30-32E	Manual Test	3.2V - 3.2Ah Li-FePO4
MTL30-10AT	Auto Test	3.2V - 1.0Ah Li-FePO4
MTL30-16AT	Auto Test	3.2V - 1.6Ah Li-FePO4
MTL30-20AT	Auto Test	3.2V - 2.0Ah Li-FePO4
MTL30-32AT	Auto Test	3.2V - 3.2Ah Li-FePO4
MTL30-16DALI	DALI 2	3.2V - 1.6Ah Li-FePO4
MTL30-20DALI	DALI 2	3.2V - 2.0Ah Li-FePO4
MTL30-32DALI	DALI 2	3.2V - 3.2Ah Li-FePO4
MTL30-16LUM	Wireless	3.2V - 1.6Ah Li-FePO4
MTL30-CBE	Central Eco	-
MTL30-CBDALI	Central DALI	-

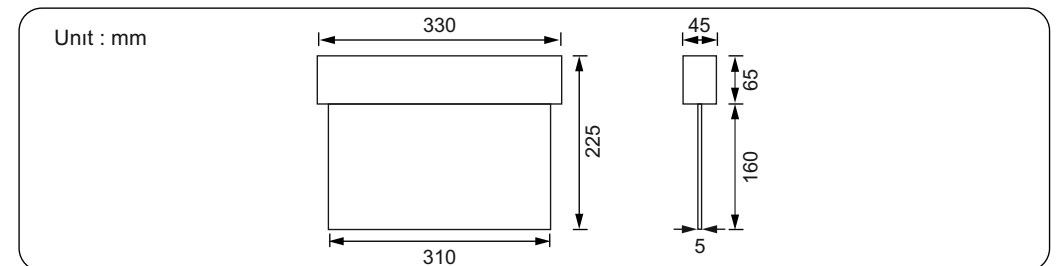


1




2

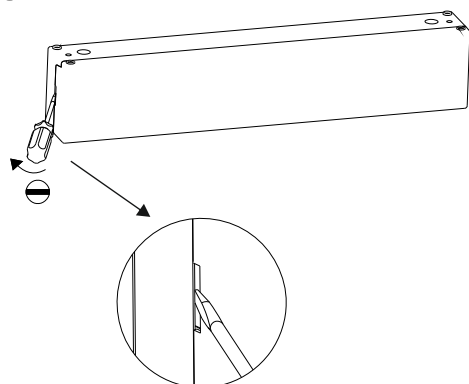


3

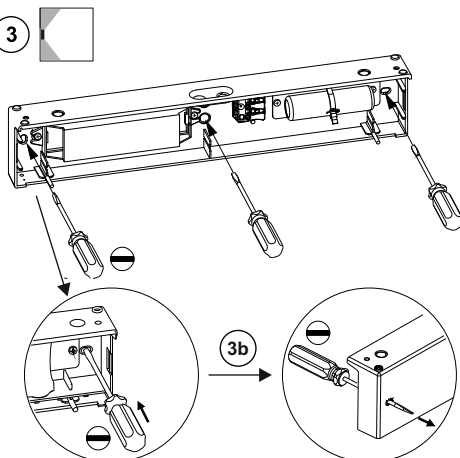


4

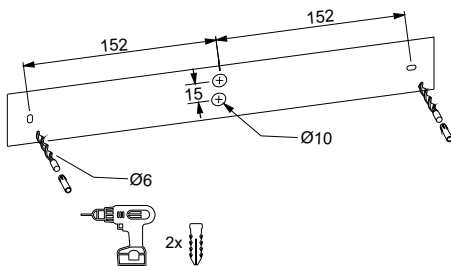

5

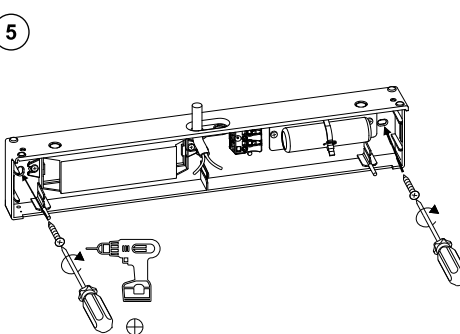

6

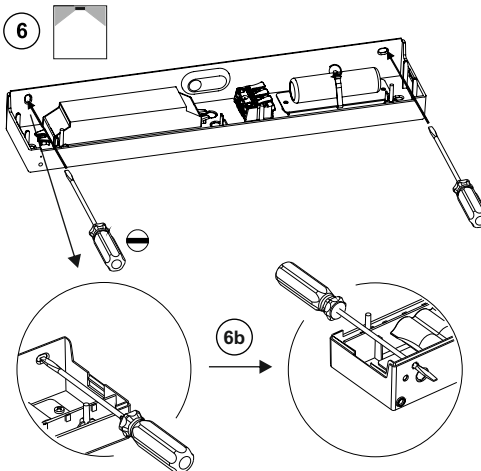

7


8-9mm
0.75 -2.5mm²




Up to 2 x 2.5 mm² per connector pole

7a

ECO /Auto Test /LUMINULA




7b DALI




7c

Central Battery System (CBS)




7d

Central Battery System (CBS) DALI




8


ECO / Auto Test / DALI / LUMINULA

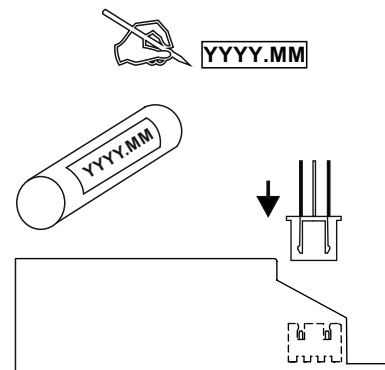

9

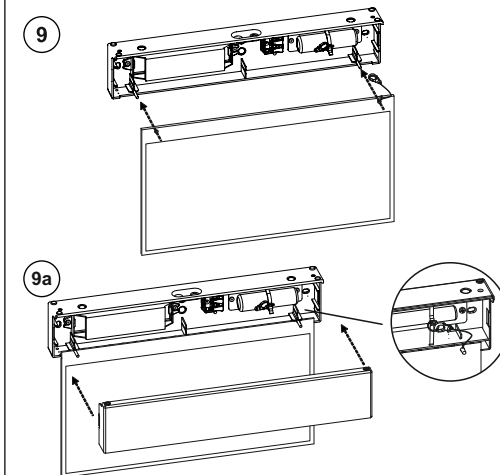

10

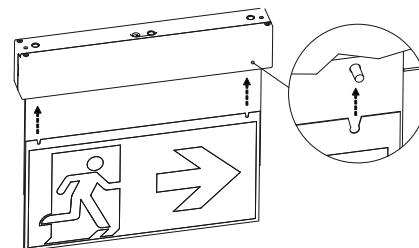

11

